

Selection - CC-ATX 354-A T

Product Code	1XC3512
Requested Air Volume	3 366 m ³ /h
Requested Pressure	0,577 Pa
Air Volume	3 367 m ³ /h
Static Pressure	0,577 Pa
Total Pressure	58 Pa
Velocity Pressure	58 Pa
Outlet Velocity	9,72 m/s
SFP	0,12 W/l/s
Fan Total Efficiency	48,6 %
Fan Static Efficiency	0,5 %
Fan Speed	1440 rpm
Air Properties	1,22kg/m ³ / 15°C / 0m / 50% RH
Fan Absorbed Power	0,112 kW
Temperature Range	-20°C +40°C


Motor selection

Electrical Supply	400/3/50
Motor Rating	0,12 kW
Enclosure/Class	55 / F
Frame Size	63
Poles number	4
Motor Speed	1360 rpm
Full Load Current	0,47 A

ERP Information

ERP Compliance	Exempt
Type	-
Regulation	-
Category of measure	-

Fan Performance

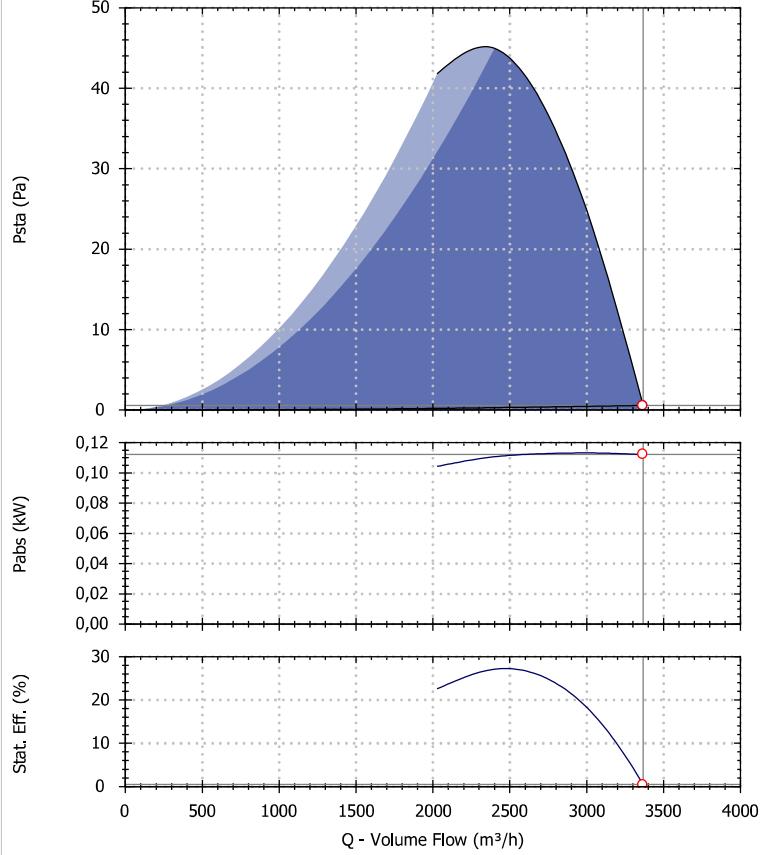


Sound Performance

Hz	63	125	250	500	1k	2k	4k	8k	Overall	
Lw	46	64	66	71	72	70	67	62	77	dB
Lw(A)	20	48	57	68	72	71	68	61	76	dB(A)
LpA @ 3m	-	27	37	47	51	51	47	40	56	dB(A)

Sounds spectra refers to Maico Italia measures performed in our laboratories according to 123. The values provided are just indicative of the situation and Maico Italia declines every responsibility in case different levels measured by our customers as the installation types and the environmental variables may increase/decrease these values.

Drawing and Dimensions - CC-ATX 354-A T

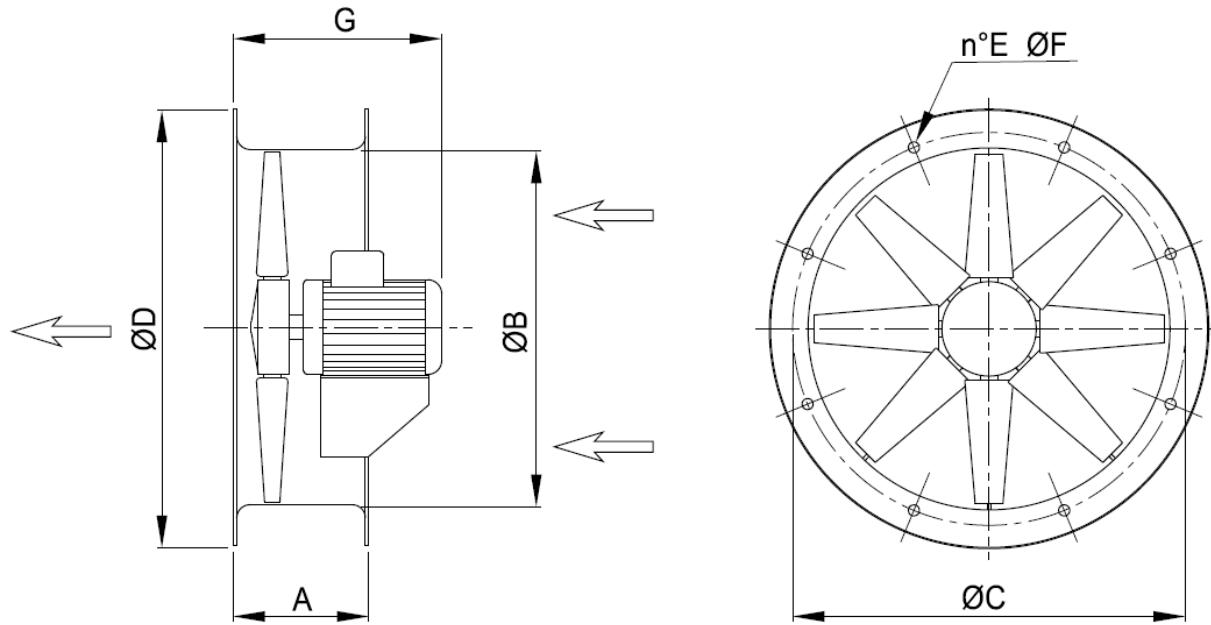


Key	A	E	G	Kg	OB	OC	OD	OF
Value [mm]	200	8	380	25	350	395	446	10

Drawings are indicative of the size of the selected fan. These dimensions may vary, even without any explicit advice. To have more accurate information contact your local agency.

Electric Wire Connections

230 V/3 Ph/50 Hz



400 V/3 Ph/50 Hz

